

TECHNICAL DATA

ShowTime SK12

full-range passive loudspeaker

Product Overview

ShowTime SK12 is a 12-inch full-range indoor loudspeaker specially tuned for KTV (karaoke) applications. Combining exceptional performance with everyday reliability, ShowTime delivers rich, room-filling sound, with a frequency range of 45 Hz–20 kHz and 132 dB max SPL. A powerful 12-inch woofer and Bose Professional EMB2S compression driver provide exceptional vocal clarity and tonal consistency, with a tailored midrange boost that makes every note easier to sing. Engineered with professional-grade materials and components, the SK12's rear-ported design creates extended bass response and smooth, balanced sound. M8 threaded inserts allow for flexible mounting either vertically or horizontally, and a convenient pole-mount adapter makes portable use a breeze.



Key Features

Powerful 12-inch woofer for rich, immersive sound that fills the room

Bose Professional EMB2S compression driver (2-inch voice coil) delivers exceptional vocal intelligibility and tonal consistency

Rear-ported design extends low-frequency range for greater bass response and smooth, balanced sound in both vertical and horizontal installations

Neutrik® speakON® connectors ensure secure, reliable connection to amplifiers

Convenient M8 threaded inserts for permanent vertical or horizontal installation, with available pole-mount adapter for portable use

Professional-grade materials and components for exceptional reliability

Applications

KTV rooms and karaoke

Parties and events

Restaurants and bars

TECHNICAL DATA

ShowTime SK12

full-range passive loudspeaker

Technical Specifications

SINGLE-LOUDSPEAKER PERFORMANCE	
System Type	Passive 2-way bass-reflex system, rear-ported
Frequency Response (-3 dB) ¹	80 Hz – 16,000 Hz
Frequency Range (-10 dB) ¹	45 Hz – 20,000 Hz
Nominal Coverage Pattern	90° horizontal × 60° vertical, rotatable
Audio Performance	
Power Handling, Long-term Continuous ²	600 W
Power Handling, Peak ²	2400 W
Sensitivity (SPL / 1 W @ 1 m) ³	98 dB
Calculated Maximum SPL @ 1 m, Continuous ⁴	126 dB
Calculated Maximum SPL @ 1 m, Peak	132 dB
Crossover	2.7 kHz, passive internal crossover
Loudspeaker EQ	None required
TRANSDUCERS	
Low Frequency	1 × 12-in (305 mm) ferrite woofer
High Frequency	1 × Bose Professional EMB2S titanium-diaphragm, neodymium compression driver with 2-in (51 mm) voice coil
Nominal Impedance	8 Ω
PHYSICAL	
Enclosure Material	Hexagonal, 15 mm plywood
Finish	Polyurethane coating
Grille	Perforated steel, powder-coated finish, black
Color	Black
Environmental	Indoors only
Connectors	(2) Neutrik® speakON® NL4MP
Suspension / Mounting	(1) bottom-panel 35 mm (1.4 in) pole mount adapter (for loudspeaker stand) (5) top-panel & side-panel M8 threaded inserts (for suspension) (4) rear-panel M8 threaded inserts (for optional bracket)
Product Dimensions (height × width × depth)	600 mm × 360 mm × 420 mm (23.6 in × 14.2 in × 16.5 in)
Net Weight	23.1 kg (50.9 lb)
Shipping Weight	27.7 kg (61.1 lb)
Package Contents	(1) ShowTime SK12, (1) installation guide
Optional Accessories	AMUPOLEAT external pole adapter
PRODUCT CODES	
ShowTime SK12 loudspeaker	A00559-0100 SPKR,SHOWTIME SK12,BLK
AMUPOLEAT external pole adapter	893630-0100 KIT,AMU POLE CUP,BLK

Footnotes

1. Full space (4π) conditions.
2. Test using pink noise filtered to meet IEC 268-5, 6-dB crest factor, 600 W for 2 hours.
3. Sensitivity measured in anechoic environment with recommended loudspeaker processing.
4. Maximum SPL calculated using sensitivity and power ratings, exclusive of power compression.


For additional specifications and application information, visit BoseProfessional.com. Specifications are subject to change. 04/2025

TECHNICAL DATA


ShowTime SK12

full-range passive loudspeaker

Frequency Response ⁵

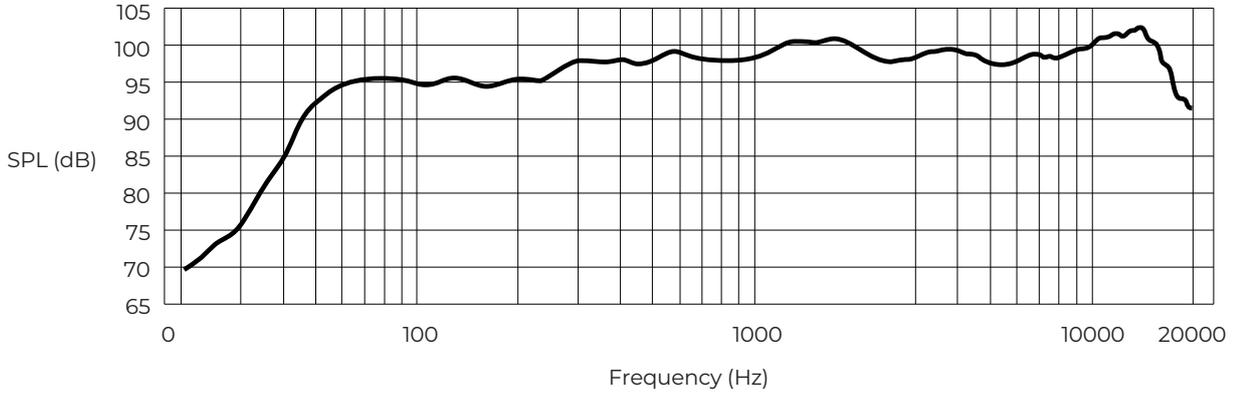

Beamwidth ⁶

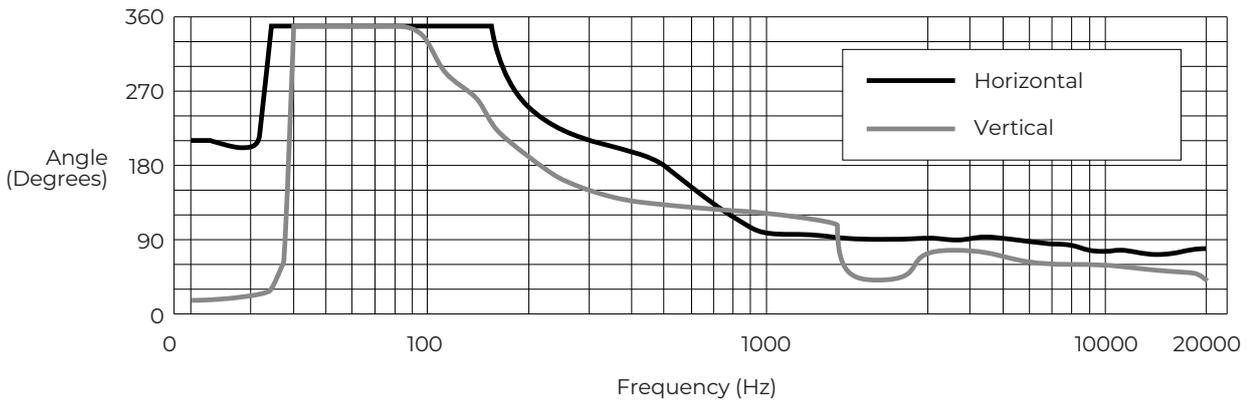

5. 20 μ Pa reference.

6. $r = 1$ m. $\Phi = 90^\circ$.


For additional specifications and application information, visit BoseProfessional.com. Specifications are subject to change. 04/2025

TECHNICAL DATA


ShowTime SK12

full-range passive loudspeaker


Dimensions ⁷

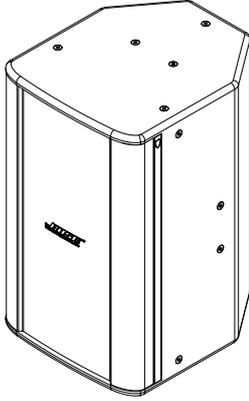


Front View

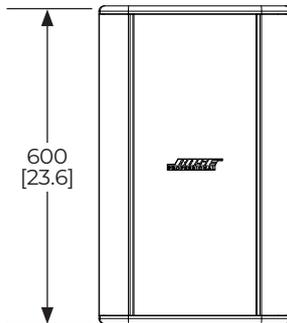


Bottom View

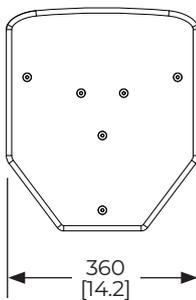

Right View ⁸

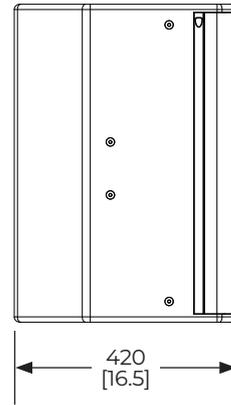


Rear View

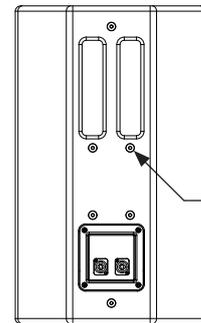

M8 threaded inserts × 4

Top View

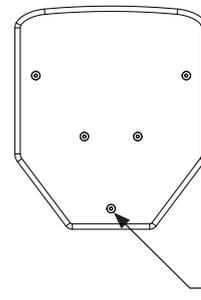

M8 threaded inserts × 5

7. Dimensions are shown in millimeters over inches.
8. Dimensions also apply to opposite side.

© 2025 Transom Post OpCo LLC. All rights reserved. ShowTime is a trademark of Transom Post OpCo LLC. Bose is a trademark of Bose Corporation. Neutrik and speakON are registered trademarks of Neutrik AG. All other trademarks are the property of their respective owners.

For additional specifications and application information, visit BoseProfessional.com. Specifications are subject to change. 04/2025